

FURNISH AND INSTALL GAMETIME #12968 FREESTANDING A.D.A. GIZMO PANEL OR APPROVED EQUAL INCLUDING ALL APPURTENANCES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS. FINAL LOCATION TO BE DETERMINED BY THE ENGINEER IN THE FIELD

FURNISH AND INSTALL 20± L.F. 6" PPT UNDERDRAIN @ 2.00%

FURNISH AND INSTALL SLANT TOP WASTE AND RECYCLABLE CONTAINER DOUBLE CLUSTER AS MANUFACTURED BY WINDSOR BARREL WORKS OR APPROVED EQUAL (TYP.)

FURNISH AND INSTALL GAMETIME #UF9206 PARK BENCH OR APPROVED EQUAL INCLUDING ALL APPURTENANCES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS (TYP.)

REMOVE AND RELOCATE EXISTING BENCH, LOCATION TO BE DETERMINED BY ENGINEER IN THE FIELD

FURNISH AND INSTALL GAMETIME LOOP BIKE RACK #7702 OR APPROVED EQUAL INCLUDING ALL APPURTENANCES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS

MATCH EXISTING CONCRETE WALKWAY

FURNISH AND INSTALL 40± L.F. 6" PPT UNDERDRAIN @ 2.00%

RELOCATED PLAYGROUND, AS DIRECTED BY ENGINEER

FURNISH AND INSTALL GAMETIME #UF9206 PARK BENCH OR APPROVED EQUAL INCLUDING ALL APPURTENANCES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS (TYP.)

FURNISH AND INSTALL 40± L.F. 6" PPT UNDERDRAIN @ 2.00%

FURNISH AND INSTALL GAMETIME #12584 PRIMETIME SWING ADD-A-BAY INCLUDING ADAPTIVE SWING SEAT GAMETIME #8537 AND ENCLOSED TOT SEAT #1470 APPURTENANCES OR APPROVED EQUAL IN ACCORDANCE WITH THE CONTRACT DOCUMENTS (TYP.)

FURNISH AND INSTALL GAMETIME #12583 PRIMETIME SWING INCLUDING BELT SEATS GAMETIME #1483 OR APPROVED EQUAL APPURTENANCES IN ACCORDANCE WITH THE CONTRACT DOCUMENTS (TYP.)

FURNISH AND INSTALL 119± L.F. 6" SOLID WALL POLYETHYLENE TUBING @ 3.00%

REMOVE AND RELOCATE EXISTING PARK SIGN USING UPGRADED SIGN POSTS, FINAL LOCATION TO BE DETERMINED BY ENGINEER IN THE FIELD

REMOVE AND REPLACE EXISTING CONCRETE CURB AND/OR CURB AND GUTTER AND SIDEWALK, AS DIRECTED BY ENGINEER, TO CONSTRUCT A.D.A. COMPLIANT HANDICAP RAMP (TYP.) H/C RAMP TO RECEIVE TRUNCATED DOMES. (TYP.)

ACCESSIBLE CURB RAMPS ARE TO BE CONSTRUCTED IN STRICT ADHERENCE WITH A.D.A. STANDARDS FOR ACCESSIBLE CURB RAMPS. ANY WORK PERFORMED BY THE CONTRACTOR THAT DOES NOT MEET THE REQUIREMENTS OF A.D.A. STANDARDS WILL BE REJECTED.

BENCH MARK T-PIN #101	
LOCATION	ELEVATION
	93.98
N 583518.536	E 526841.665

BENCH MARK T-PIN #102	
LOCATION	ELEVATION
	93.88
N 583377.794	E 526787.565

BLOCK 227




LOT 1

SHEINFINE AVENUE

LEONARDINE AVENUE

(50' R.O.W.)

(50' R.O.W.)

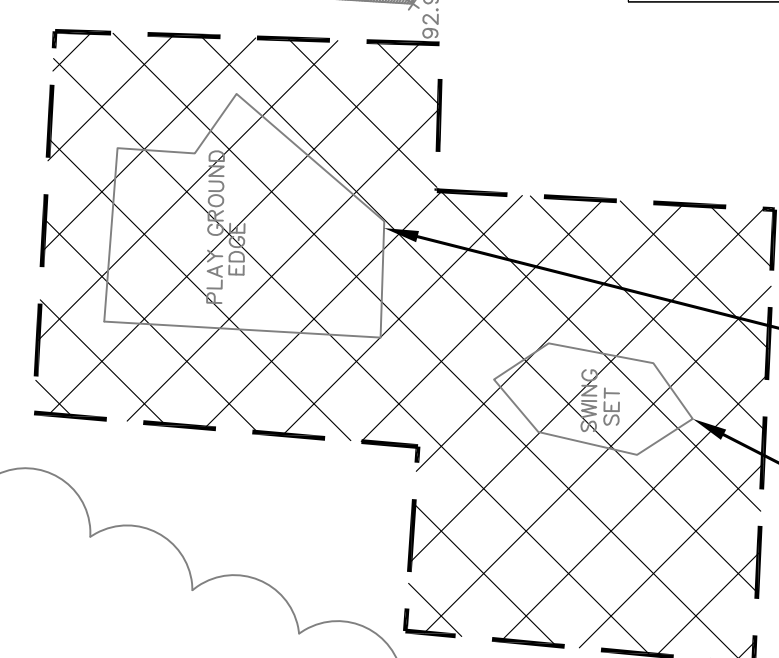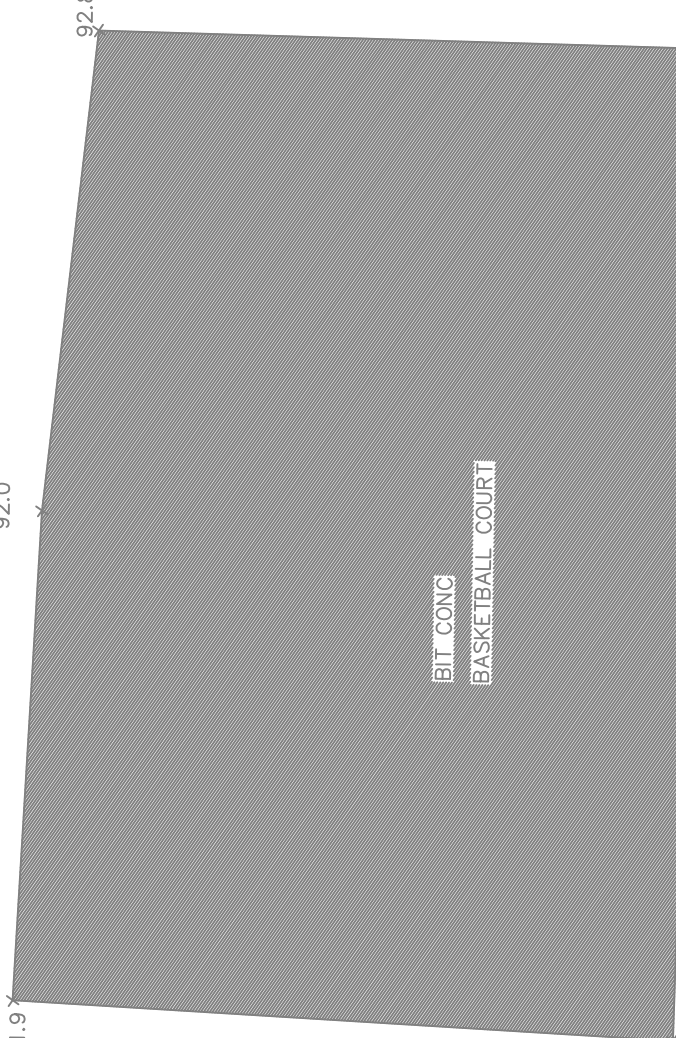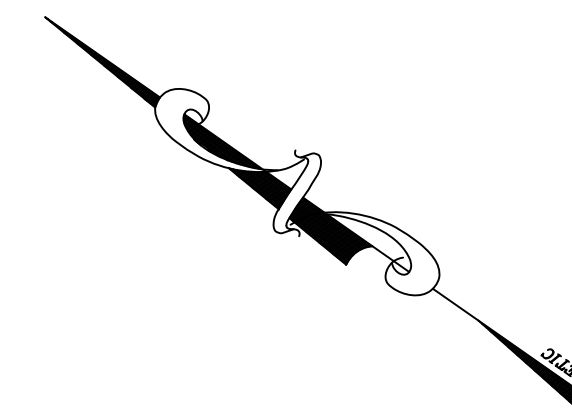

EXISTING PLAYGROUND EQUIPMENT TO BE SALVAGED AND RELOCATED AS DIRECTED BY ENGINEER

REMOVE EXISTING SWING SET

EXISTING TREE TO BE REMOVED

REMOVE EXISTING SWING SET

CONSTRUCT DOGHOUSE MANHOLE RIM 96.00± INV 92.43±

BOROUGH OF SOUTH RIVER  
MIDDLESEX COUNTY, NEW JERSEY

## IMPROVEMENTS TO LEONARDINE PARK

CONSTRUCTION PLAN & NOTES

Also known as the Sheldon Sheinfine Park Block 227, Lot 1

(732) 727 8000 CONSULTING AND MUNICIPAL ENGINEERS (732) 462 7400

3141 BORDENTOWN AVENUE, PARLIN, NEW JERSEY 08859-1162 1460 ROUTE 9 SOUTH, HOWELL, NEW JERSEY 07731-1194

STORM MH  
INV 86.57  
INV 83.57